

# 19-inch wall-mounted housing Pro

**roline**<sup>®</sup>  
Designed for Professionals

## Data sheet



The ROLINE Pro series wall-mounted enclosures have been specially designed for flexible network cabling. Each enclosure has a slide-on cable inlet in the roof with a foam rubber seal. The robust steel constructions of the enclosures are made of sheet steel up to 1.5 mm thick.

### Characteristics:

- Load capacity: 100 kg
- Front door made of toughened glass, lockable
- 1-point locking system on the front door
- Side panels are lockable and removable
- Cable entry at the rear and base
- Roof with cut-out for fan modules
- Ventilation slots for passive ventilation and extraction
- incl. mounting material
- Colour: Light grey, RAL 7035 or Jet black, RAL 9005
- IP protection class: IP20

# 19-inch wall-mounted housing Pro

**roline**<sup>®</sup>  
Designed for Professionals

## Data sheet

The ROLINE Pro series offers a versatile selection of wall-mounted enclosures in various height units from 7 U to 20 U and in the colours grey (RAL 7035) and black (RAL 9005).

Manuf. no.	Height	Width (mm)	Depth (mm)	Colour / RAL
26.21.0000	7 U	600	450	grey / RAL 7035
26.21.0170	7 U	600	450	black / RAL 9005
26.21.0001	7 U	600	600	grey / RAL 7035
26.21.0171	7 U	600	600	black / RAL 9005
26.21.0002	9 U	600	450	grey / RAL 7035
26.21.0172	9 U	600	450	black / RAL 9005
26.21.0003	9 U	600	600	grey / RAL 7035
26.21.0173	9 U	600	600	black / RAL 9005
26.21.0004	12 U	600	450	grey / RAL 7035
26.21.0174	12 U	600	450	black / RAL 9005
26.21.0175	12 U	600	600	grey / RAL 7035
26.21.0005	12 U	600	600	black / RAL 9005
26.21.0006	16 U	600	450	grey / RAL 7035
26.21.0176	16 U	600	450	black / RAL 9005
26.21.0007	16 U	600	600	grey / RAL 7035
26.21.0177	16 U	600	600	black / RAL 9005
26.21.0008	20 U	600	450	grey / RAL 7035
26.21.0178	20 U	600	450	black / RAL 9005
26.21.0009	20 U	600	600	grey / RAL 7035
26.21.0179	20 U	600	600	black / RAL 9005

# 19-inch wall-mounted housing Pro

**roline**<sup>®</sup>  
Designed for Professionals

## Data sheet




Tempered glass front door




Rear panel with cable feed



Removable side panels

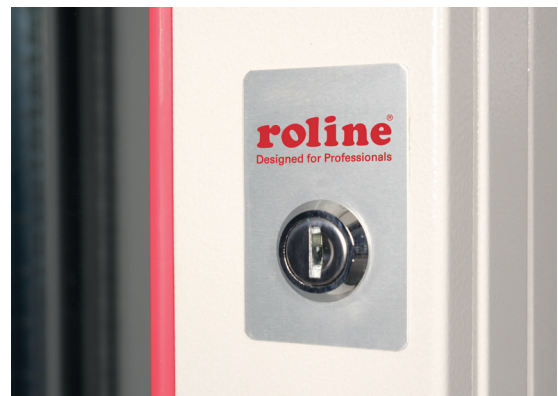

Integrated locking cylinder

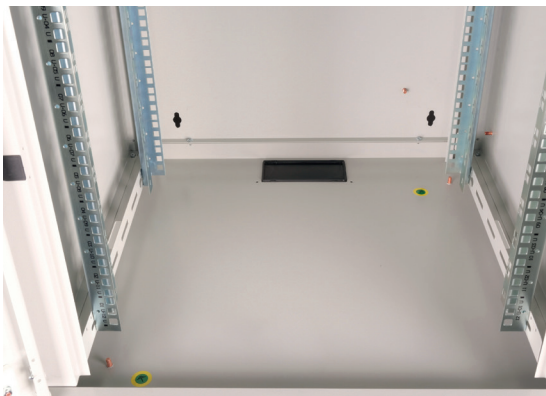

Base plate with cable feed



Roof with cut-outs for ventilation