

## LC/PC-LC/PC, Simplex, 3.0mm

PTFPSS-X-16F, PTFMS-X-16F, PTFSO3-X-16F, PTFSO4-X-16F

## **DATASHEET**


## **FEATURES:**

- RJ-45 style housing with push-pull coupling mechanism which allows easy disengagement in dense spaces
- Small Form Factor half the size of standard connectors
- Simplex and duplex assemblies available in standard and custom configurations
- Singlemode and Multimode
- PC Finish
- Compliant with Telcordia GR-326-CORE specification

## **SPECIFIFATIONS:**

Туре	Singlemode	Singlemode (pc)	Multimode (pc)
Insertion Loss	≤0.3 dB	≤0.3 dB	≤0.3 dB
Return Loss	≥65 dB	≥55 dB	≥25 dB
Operating Temp.	-40C-80C	-40C-80C	-40C-80C

Other hybrid patchcords are available upon request.

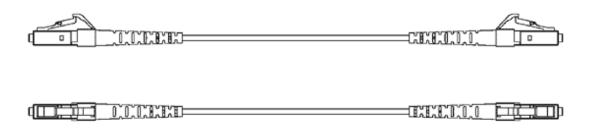

All rights reserved, including intellectual property rights. Technical data subject to modifications and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.