

## ***DATASHEET***

### ***DESCRIPTION:***

PeakOptical's PCSFP-12-1xx12-22F Transceiver is a high performance, cost effective module which have a Duplex LC optics interface. Standard AC coupled CML for high speed signal and LVTTTL control and monitor signals.

The receiver section uses a PIN receiver and the transmitter uses CWDM laser, up to 25dB link budge ensure this module SONET OC-3/SDH STM-1/SONET OC-12/SDH STM-4 80Km application.



### ***FEATURES:***

- 155Mb/s to 622M b/s Data Links
- Hot-Pluggable
- 18 CWDM Wavelengths Available
- Duplex LC connector
- RoHS compliant and Lead Free
- 25dB Power Budget
- Up to 80 km on 9/125µm SMF
- Single +3.3V Power Supply
- Monitoring Interface Compliant with SFF-8472
- Low power dissipation <600mW typically
- Commercial operating temperature range: 0°C to 70°C

### ***APPLICATIONS:***

- SONET OC-3/SDH STM-1
- SONET OC-12/SDH STM-4
- Other Optical Links

***SPECIFICATIONS:***

**Absolute Maximum Ratings:**

Parameter		Symbol	Min.	Typical	Max.	Unit
Storage Temperature		$T_S$	-40		+85	°C
Supply Voltage		$V_{CC,T, R}$	-0.5		4	V
Relative Humidity		RH	0		85	%
Case Operating Temperature	Commercial	Top	0		70	°C

**Recommended Operating Environment:**

Parameter		Symbol	Min.	Typical	Max.	Unit
Case operating Temperature	Industrial	$T_C$				
	Extended					
	Commercial		0		+70	°C
Supply Voltage		$V_{CCT, R}$	3.0		3.6	V
Power Supply Rejection			100			mV <sub>p-p</sub>

# CWDM SFP 622Mb/s Transceiver 80km

Hot Pluggable, Duplex LC, 3.3V 1270~1610nm, DDMI

## PCSFP-12-1XXX12-22F

### Electrical Characteristics ( $T_{OP} = 0$ to $70^{\circ}\text{C}$ , $V_{CC} = 3.0$ to $3.60$ Volts)

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Supply Voltage	$V_{CC}$	3.0	3.30	3.60	V	
Supply Current	$I_{CC}$		160	280	mA	
Inrush Current	$I_{surge}$			$I_{CC}+30$	mA	
Maximum Power	$P_{max}$			1.0	W	
<b>Transmitter Section:</b>						
Input differential impedance	$R_{in}$	90	100	110	•	•
Single ended data input swing	$V_{in\ PP}$	200		1200	mVp-p	
Transmit Disable Voltage	$V_D$	$V_{CC} - 1.3$		$V_{CC}$	V	2
Transmit Enable Voltage	$V_{EN}$	$V_{EE}$		$V_{EE}+0.8$	V	
Transmit Disable Assert Time	$T_{dessert}$			10	us	
<b>Receiver Section:</b>						
Single ended data output swing	$V_{out,pp}$	300		1000	mv	3
Data output rise time	$t_r$			150	ps	4
Data output fall time	$t_f$			150	ps	4
LOS Fault	$V_{losfault}$	$V_{CC} - 0.5$		$V_{CC\_host}$	V	5
LOS Normal	$V_{los\ norm}$	$V_{EE}$		$V_{EE}+0.5$	V	5
Power Supply Rejection	PSR	100			mVpp	6

Note:

1. AC coupled.
2. Or open circuit.
3. Into 100 ohm differential termination.
4. 20 – 80 %
5. LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. All transceiver specifications are compliant with a power supply sinusoidal modulation of 20 Hz to 1.5MHz up to specified value applied through the power supply filtering network shown on page 23 of the Small Form-factor Pluggable (SFP) Transceiver Multi-Source Agreement (MSA), September 14, 2000.

# CWDM SFP 622Mb/s Transceiver 80km

Hot Pluggable, Duplex LC, 3.3V 1270~1610nm, DDMI  
PCSFP-12-1XXX12-22F

Optical Parameters(TOP = 0 to 70 °C, VCC = 3.00 to 3.60 Volts)

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Transmitter Section:						
Center Wavelength	$\lambda_c$	$\lambda$ -5.5	$\lambda$	$\lambda$ +7.5	nm	1
Spectral Width(-20dB)	$\sigma$			1	nm	
Optical Output Power	P <sub>out</sub>	-3		+2	dBm	2
Optical Rise/Fall Time	t <sub>r</sub> / t <sub>f</sub>			160	ps	3
Extinction Ratio	ER	9.2			dB	
Eye Mask for Optical Output	Compliant with Eye Mask Defined in ITU-T Standard					
Receiver Section:						
Optical Input Wavelength	•	1100		1670	nm	
Optical Input Power	P <sub>in</sub>	-28		-3	dBm	4.5
Receiver Reflectance		12			dB	
Receiver Overload	P <sub>ol</sub>			-3	dBm	4.5
RX Sensitivity	Sen			-28	dBm	4.5
RX_LOS Assert	LOS <sub>A</sub>	-40			dBm	
RX_LOS Deassert	LOS <sub>D</sub>			-30	dBm	
RX_LOS Hysteresis	LOS <sub>H</sub>		2	2.5	dB	
General Specifications						
Data Rate	BR	155		622	Mb/s	
Bit Error Rate	BER			10 <sup>-12</sup>		
Max. Supported Link Length on 9/125μm SMF@155Mb/s,622Mb/s	LMAX		80		km	6
Total System Budget	LB	25			dB	7

Note


- Also specified to meet curves in FC-PI 13.0 Figures 18 and 19, which allow trade-off between wavelength spectral width.
- Class 1 Laser Safety per FDA/CDRH and EN (IEC) 60825 regulations.
- Unfiltered, 20-80%. Complies with IEEE 802.3 (Gig. E), FC 1x and 2x eye masks when filtered.
- Measured with conformance signals defined in FC-PI 13.0 specifications.
- Measured with PRBS  $2^{7-1}$  at  $10^{-12}$  BER
- Dispersion limited per FC-PI Rev. 13
- Attenuation of 0.25 dB/km is used for the link length calculations. Distances are indicative only. Please refer to the Optical Specifications in Table IV to calculate a more accurate link budget based on specific conditions in your application.

### Digital Diagnostic Monitor Characteristics

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF8472 Rev10.2 with internal calibration mode. For external calibration mode please contact our sales stuff.


Parameter	Symbol	Min.	Max.	Unit
Temperature monitor absolute error	DMI_Temp	-3	3	degC
Laser power monitor absolute error	DMI_TX	-3	3	dB
RX power monitor absolute error	DMI_RX	-3	3	dB
Supply voltage monitor absolute error	DMI_VCC	-0.08	0.08	V
Bias current monitor	DMI_Ibias	-10%	10%	mA

### Block Diagram of Transceiver:

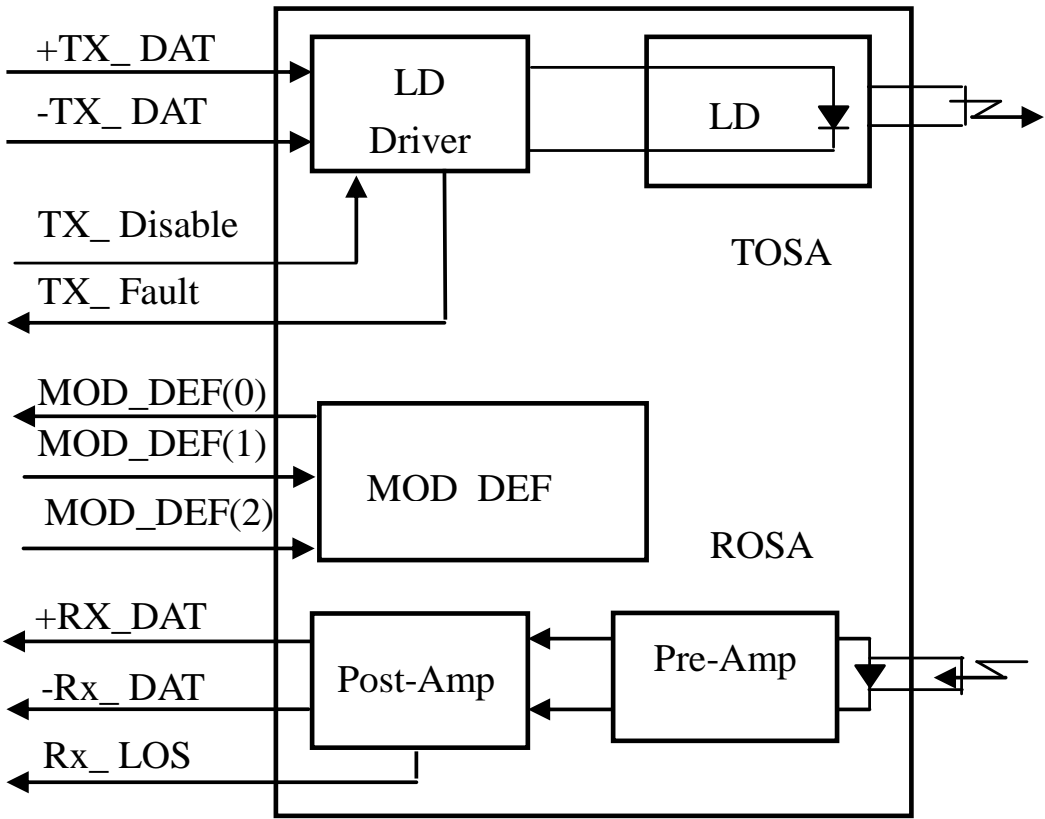


**Figure1: Block Diagram**

**Pin Assignment:**

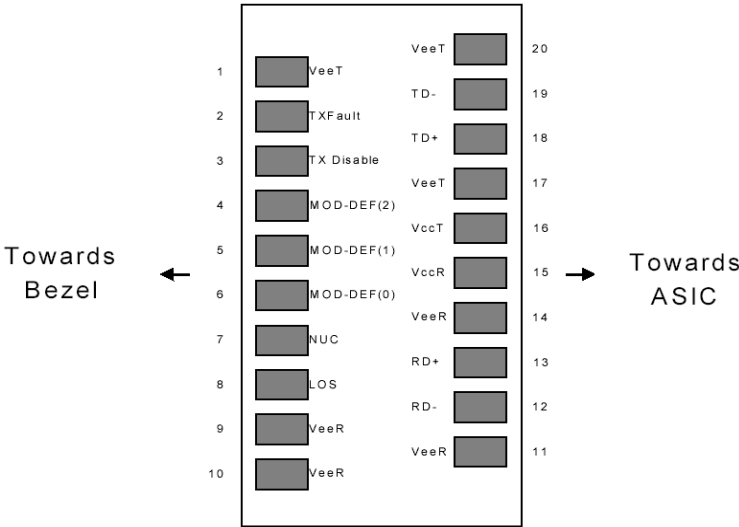

**Figure2: Diagram of Host Board Connector Block Pin Numbers and Names**

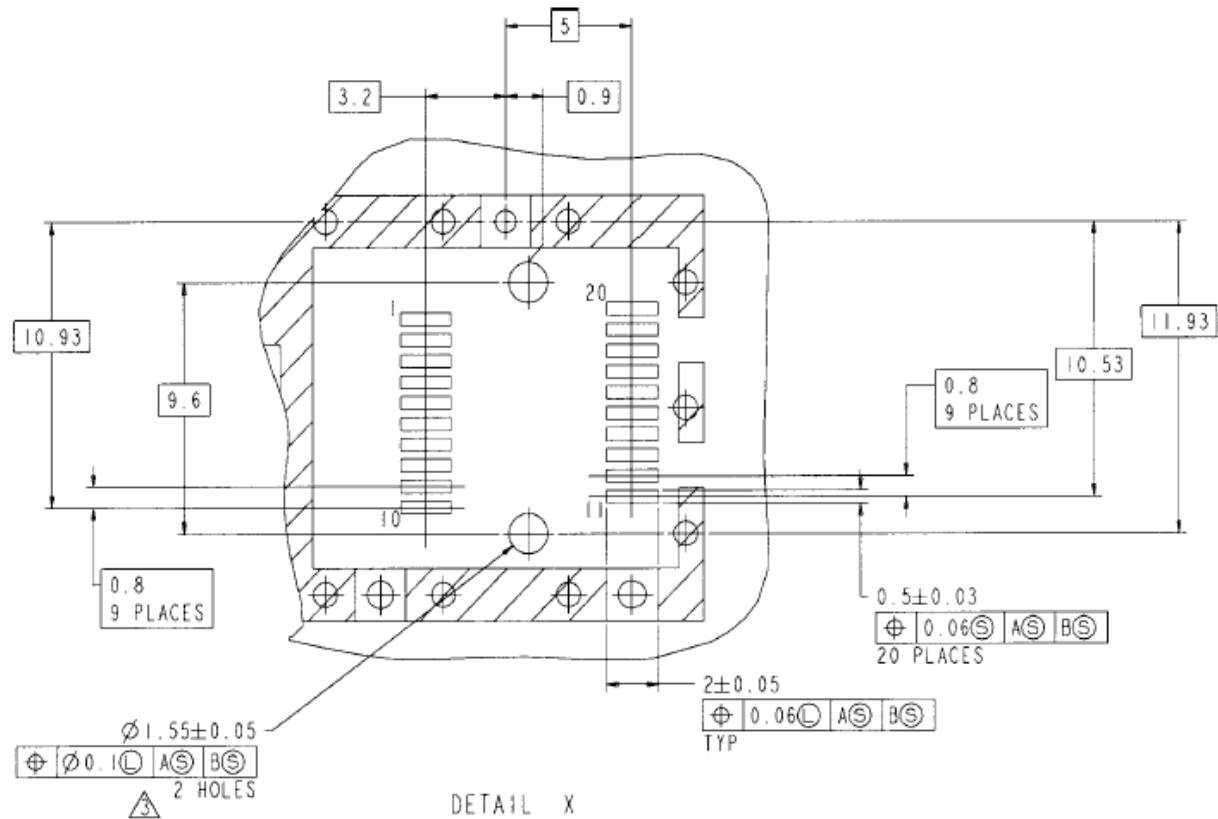

**Figure 3. SFP Host Board Mechanical Layout**



## Pin Description:

Pin No	Name	Function	Plug Seq	Notes
1	VeeT	Transmitter Ground	1	1
2	TX Fault	Transmitter Fault Indication	3	
3	TX Disable	Transmitter Disable	3	2
4	MOD-DEF2	Module Definition	2	3
5	MOD-DEF1	Module Definition 1	3	3
6	MOD-DEF0	Module Definition 0	3	3
7	Rate Select	Not Connected	3	4
8	LOS	Loss of Signal	3	5
9	VeeR	Receiver Ground	1	1
10	VeeR	Receiver Ground	1	1
11	VeeR	Receiver Ground		1
12	RD-	Inv. Received Data Out	3	6
13	RD+	Received Data Out	3	6
14	VeeR	Receiver Ground	3	1
15	VccR	Receiver Power	2	1
16	VccT	Transmitter Power	2	
17	VeeT	Transmitter Ground	1	
18	TD+	Transmit Data In	3	6
19	TD-	Inv. Transmit In	3	6
20	VeeT	Transmitter Ground	1	

### Notes:

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
3. Should be pulled up with 4.7k - 10 kohms on host board to a voltage between 2.0V and 3.6V. MOD\_DEF(0) pulls line low to indicate module is plugged in.
4. Rate select is not used
5. LOS is open collector output. Should be pulled up with 4.7k – 10 kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
6. AC Coupled



**CWDM SFP 622Mb/s Transceiver 80km**  
**Hot Pluggable, Duplex LC, 3.3V 1270~1610nm, DDMI**  
**PCSFP-12-1XXX12-22F**

**Serial ID Memory Contents:**

Data Address	Length (Byte)	Name of Length	Description and Contents
<b>Base ID Fields</b>			
0	1	Identifier	Type of Serial transceiver (03h=SFP)
1	1	Reserved	Extended identifier of type serial transceiver (04h)
2	1	Connector	Code of optical connector type (07=LC)
3-10	8	Transceiver	SONET
11	1	Encoding	SONET Scrambled
12	1	BR,Nominal	Nominal baud rate, unit of 100Mbps
13	1	Reserved	(0000h)
14	1	Length(9um,km)	Link length supported for 9/125um fiber, units of km
15	1	Length(9um)	Link length supported for 9/125um fiber, units of 100m
16	1	Length(50um)	Link length supported for 50/125um fiber, units of 10m
17	1	Length(62.5um)	Link length supported for 62.5/125um fiber, units of 10m
18	1	Length(Copper)	Link length supported for copper, units of meters
19	1	Reserved	
20-35	16	Vendor Name	SFP vendor name:
36	1	Reserved	
37-39	3	Vendor OUI	SFP transceiver vendor OUI ID
40-55	16	Vendor PN	Part Number: PCSFP-12-1xx12-22F) (ASCII)
56-59	4	Vendor rev	Revision level for part number
60-61	2	Wavelength	Laser wavelength
62	1	Reserved	
63	1	CCID	Least significant byte of sum of data in address 0-62
<b>Extended ID Fields</b>			
64-65	2	Option	Indicates which optical SFP signals are implemented(001Ah = LOS, TX_FAULT, TX_DISABLE all supported)
66	1	BR, max	Upper bit rate margin, units of %
67	1	BR, min	Lower bit rate margin, units of %
68-83	16	Vendor SN	Serial number (ASCII)
84-91	8	Date code	Manufacturing date code
92	1	Diagnostic Type	Diagnostics
93	1	Enhanced Options	Diagnostics
94	1	SFF-8472	Diagnostics
95	1	CCEX	Check code for the extended ID Fields (addresses 64 to 94)
<b>Vendor Specific ID Fields</b>			
96-127	32	Readable	Vendor specific date, read only

All rights reserved, including intellectual property rights. Technical data subject to modifications and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.


## Diagnostics Memory Contents(A2h):

Data Address	Length (Byte)	Name of Length	Description and Contents
<b>Diagnostic and control/status fields</b>			
0-39	40	A/W Thresholds	Diagnostic Flag Alarm and Warning Thresholds
40-55	16	Unallocated	
56-91	16	Ext Cal Constants	Diagnostic calibration constants for optional External Calibration
92-94	3	Unallocated	
95	1	CC_DMI	Check code for Base Diagnostic Fields (addresses 0 to 94)
96-105	10	Diagnostics	Diagnostic Monitor Data (internally or externally calibrated)
106-109	4	Unallocated	
110	1	Status/Control	Optional Status and Control Bits
111	1	Reserved	Reserved for SFF-8079
112-113	2	Alarm Flags	Diagnostic Alarm Flag Status Bits
114-115	2	Unallocated	
116-117	2	Warning Flags	Diagnostic Warning Flag Status Bits
118-119	2	Ext Status/Control	Extended module control and status bytes
<b>General use fields</b>			
120-127	8	Vendor Specific	Vendor specific memory addresses
128-247	120	User EEPROM	User writable non-volatile memory
248-255	8	Vendor Control	Vendor specific control addresses

## References

- Small Form-factor Pluggable (SFP) Transceiver Multi-source Agreement (MSA) September 14, 2000.
- Bellcore GR-253 and ITU-T G.957 Specifications.

**Recommended Circuit:**

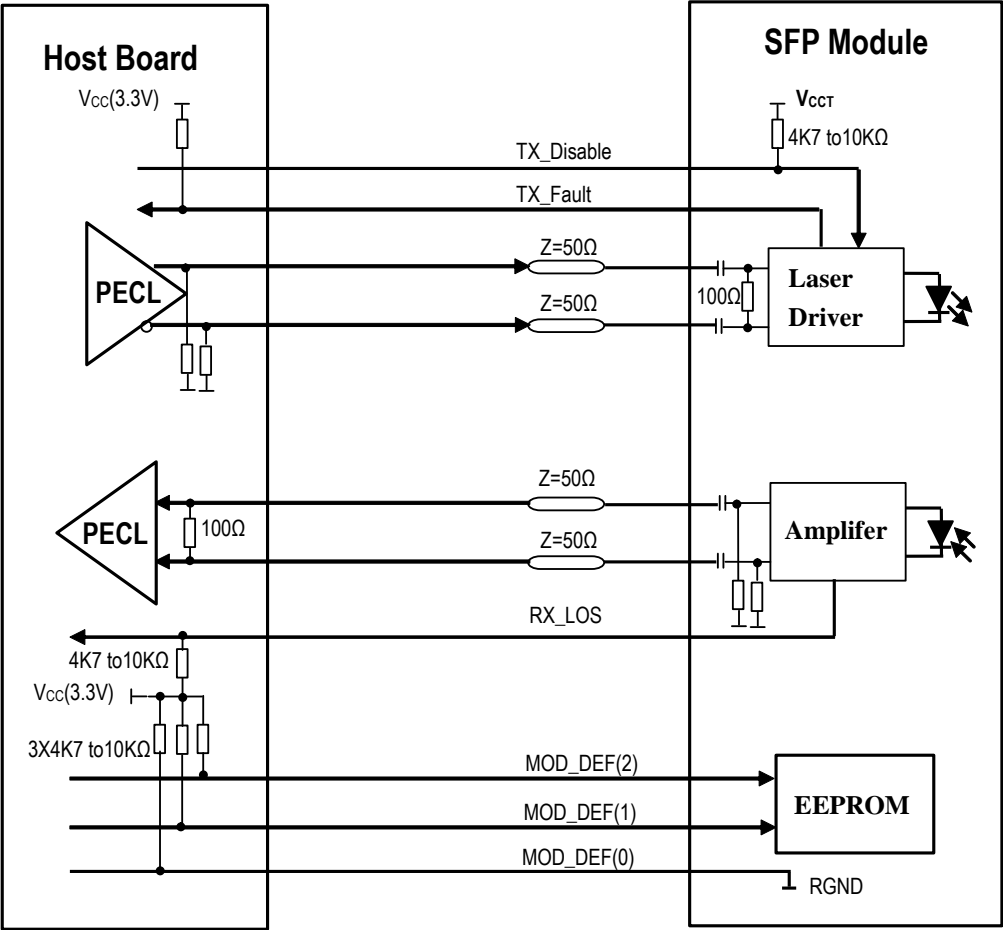


**Figure 5. SFP Host Recommended Circuit**



**CWDM SFP 622Mb/s Transceiver 80km**  
**Hot Pluggable, Duplex LC, 3.3V 1270~1610nm, DDMI**  
**PCSFP-12-1XX12-22F**

**Mechanical Dimensions:**

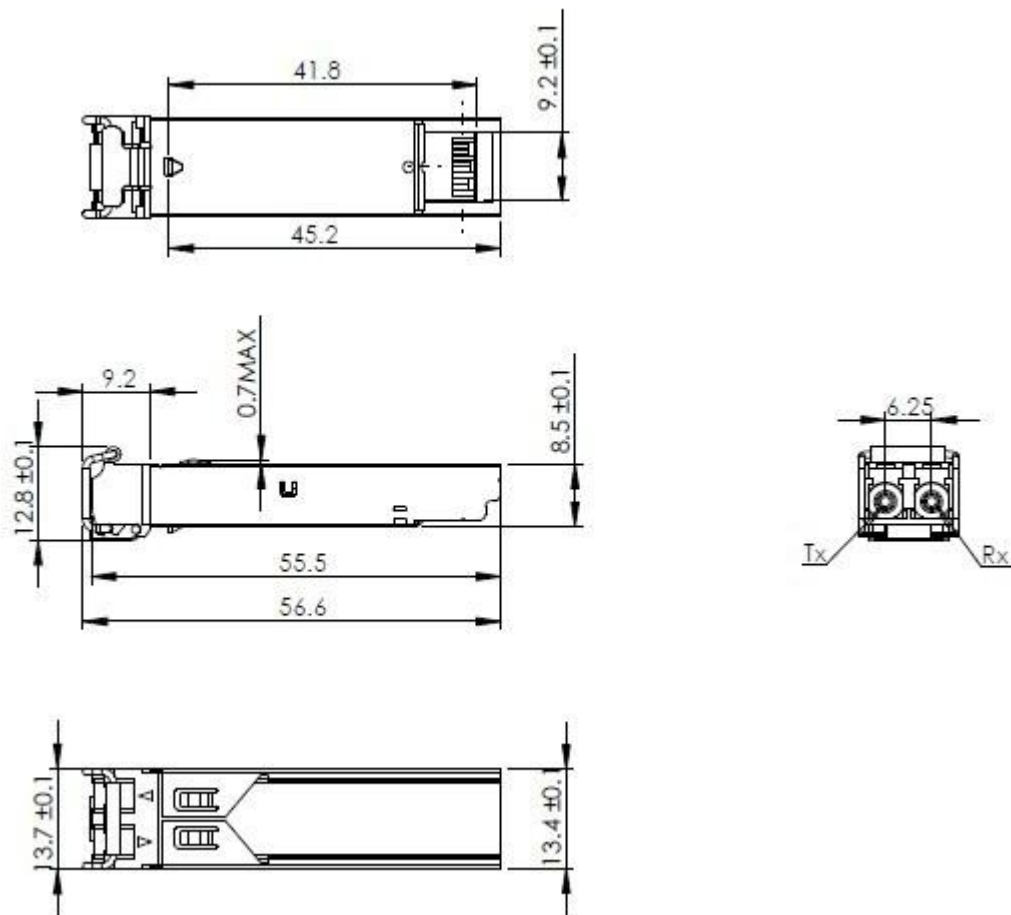

**Note:** In the Part No. of of **PCSFP-12-1xx12-22F**, XX stands for wavelength, such as:  
27: for 1270nm, 29: for 1290nm, 31: for 1310nm, 33: for 1330nm, 35: for 1350nm,  
37: for 1270nm, 39: for 1290nm, 41: for 1410nm, 43: for 1430nm, 45: for 1450nm,  
47: for 1470nm, 49: for 1490nm, 51: for 1510nm, 53: for 1530nm, 55: for 1550nm,  
57: for 1570nm, 59: for 1590nm, 61: for 1610nm.